



TECH TO INDUSTRY

# PANEL PC SEYPOS K755-D36



WEBCAM



IP66



FANLESS



WiFi



MSR



DEVICE BOX



Ultra Slim,  
48mm Thickness



True-Flat Resistive Gesture Touch  
True-Flat Projected Capacitive  
Multi-Touch




Rich I/O Ports Provide  
Excellent Peripheral Connectivity



Aluminum Die Casting

## Features

- 10.1" True-Flat Resistive or PCAP Touch
- Intel Bay Trail Processor
- Front IP65
- Fanless and Silent
- Webcam Available
- WiFi + BT Available
- MSR Available
- Device Box (Smart IC Card Reader, RFID, Scanner, Line-out, Mic-in) Available

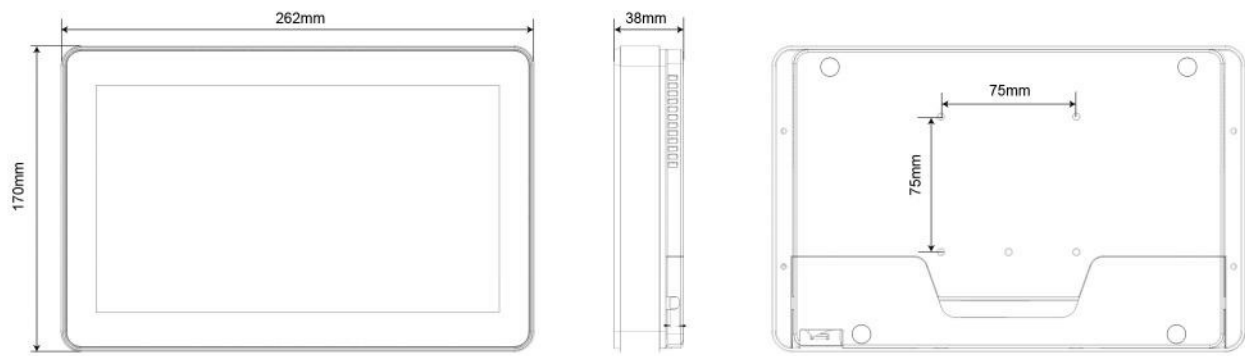

## Specification

Motherboard	Type Processor Chipset System Memory Memory Socket Graphic Engine	D36 Intel Bay Trail CPU Celeron J1900, Quad Core 2G/2.41G CPU Integrated DDR3L 1333MHz (max. 8G) 1 x SO-DIMM Intel HD Graphic
LCD Touch Panel	LCD Size Brightness Resolution Touch Screen	10.1" (16:9 ratio) 200 nits 1366 x 768 True-Flat Resistive or PCAP Touch
Storage Device	HDD/ SSD Flash Memory	1 x 2.5" SATA SATA Slim SSD 8G/ 16G/ 32G/ 64G (Option)
Expansion	Mini PCI-E Socket	1
External I/O Ports	USB Serial Port LAN VGA	1 x USB3.0, 4x USB2.0 3x RJ48 (with DB9 convert cable) 1 x RJ45 1 x DB15
Audio	Internal Speaker	2x 2W
Power	Power Adapter Connector	65W / 19V 4-pole DIN (with latch)
Peripheral (Option)	WiFi + BT Built-in Webcam MSR Device Box	802.11 b/g/n WLAN card + BT 4.0 2MP 3-Track MSR (USB) Smart IC Card Reader, RFID, Scanner, Line-out, Mic-in
Certificate	EMC & Safety Medical	FCC Class A, CE Mark, LVD EN 60601-1, UL 60601-1 3rd
Environment	Ventilation Dust & Water Proof Operating Temperature Storage Temperature Humidity	Fanless Front IP65 0°C ~ 35°C (32°F ~ 95°F) (Still Air) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing
Dimension (WxDxH)		262 x 38 x 170 mm (10.4" x 1.5" x 6.7")
Weight		1.5 kg (3.3 lbs)
Mounting		VESA Mount 75 x 75
OS Supported		Windows 7 (32/64bit), Windows 8.1 (32/64bit), Windows 10 (32/64 bit), Linux