



TECH TO INDUSTRY

PANEL PC SEYPOS K755-D86U



WEBCAM



IP66



FANLESS



WiFi



MSR



DEVICE BOX



Ultra Slim,
48mm Thickness



True-Flat Resistive Gesture Touch
True-Flat Projected Capacitive
Multi-Touch




Rich I/O Ports Provide
Excellent Peripheral Connectivity



Aluminum Die Casting

Features

- 10.1" True-Flat Resistive or PCAP Touch
- Intel Skylake U Processor
- Front IP65
- Fanless and Silent
- Webcam Available
- WiFi + BT Available
- MSR Available
- Device Box (Smart IC Card Reader, RFID, Scanner, Line-out, Mic-in) Available

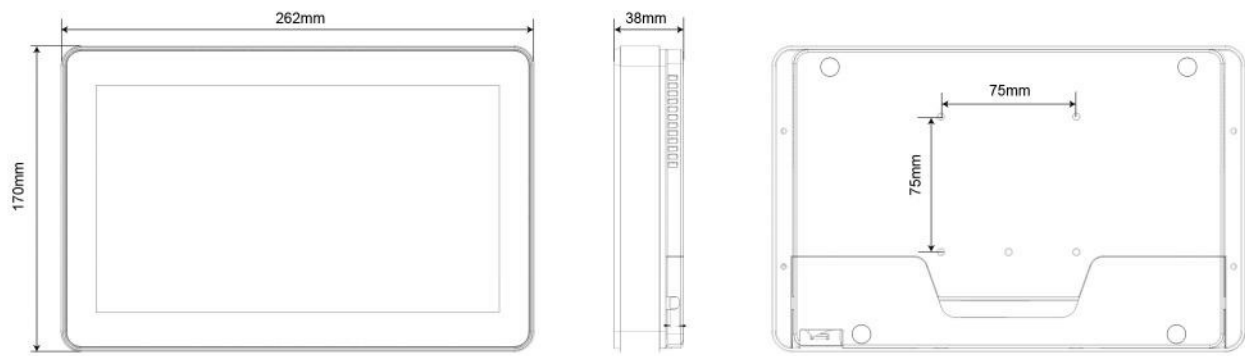

Specification

Motherboard	Type Processor Chipset System Memory Memory Socket Graphic Engine	D86U Intel Skylake U CPU Celeron 3955U, i3-6100U, i5-6300U CPU Integrated DDR3L 1600MHz (max. 8G) 1 x SO-DIMM Intel Graphic (Gen 9)
LCD Touch Panel	LCD Size Brightness Resolution Touch Screen	10.1" (16:9 ratio) 200 nits 1366 x 768 True-Flat Resistive or PCAP Touch
Storage Device	HDD/ SSD Flash Memory	1 x 2.5" SATA SATA Slim SSD 8G/ 16G/ 32G/ 64G (Option)
Expansion	Mini PCI-E Socket	1
External I/O Ports	USB Serial Port LAN VGA	4x USB3.0, 2x USB2.0 3x RJ48 (with DB9 convert cable) 1x RJ45 1x DB15
Audio	Internal Speaker	2x 2W
Power	Power Adapter Connector	65W / 19V 4-pole DIN (with latch)
Peripheral (Option)	WiFi + BT Built-in Webcam MSR Device Box	802.11 b/g/n WLAN card + BT 4.0 2MP 3-Track MSR (USB) Smart IC Card Reader, RFID, Scanner, Line-out, Mic-in
Certificate	EMC & Safety Medical	FCC Class A, CE Mark, LVD EN 60601-1, UL 60601-1 3rd
Environment	Ventilation Dust & Water Proof Operating Temperature Storage Temperature Humidity	Fanless Front IP65 0°C ~ 35°C (32°F ~ 95°F) (Still Air) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing
Dimension (WxDxH)		262 x 38 x 170 mm (10.4" x 1.5" x 6.7")
Weight		1.5 kg (3.3 lbs)
Mounting		VESA Mount 75 x 75
OS Supported		Windows 7 (64bit), POSReady 7 (64bit), Windows 8.1 (64bit), Windows Embedded 8.1 Industry (64bit), Windows 10 (64bit), Windows 10 IoT Enterprise (64bit), Linux